









Excellent grip



Good wear resistance



UV and chemical resistance




## **Technical Information**
































Diameter	Weight	Minimum Strength Spliced Rope	Minimum Strength ISO Unspliced Rope
inch	lbs/100ft	lbs	lbs
3/8	4.6	19,800	22,000
7/16	5.0	24,200	26,800
1/2	7.1	27,500	30,600
9/16	8.1	30,800	34,300
5/8	10.8	40,500	44,900
3/4	15.3	53,200	59,100
7/8	22.8	73,700	81,900
1	29.4	96,800	107,600
1 1/16	30.8	101,400	112,700
1 1/8	36.3	119,700	132,900
1 1/4	43.9	144,800	160,900
1 5/16	48.1	158,600	176,200
1 3/8	53.0	174,700	194,100
1 1/2	61.2	201,500	223,900
1 5/8	68.8	226,600	251,700
1 3/4	73.9	248,600	276,300
2	107.5	334,400	371,600
2 1/8	124.7	363,000	403,300

Diameter, weight and MBS are determined in accordance with CI1500-02. Custom size and length available by request.





















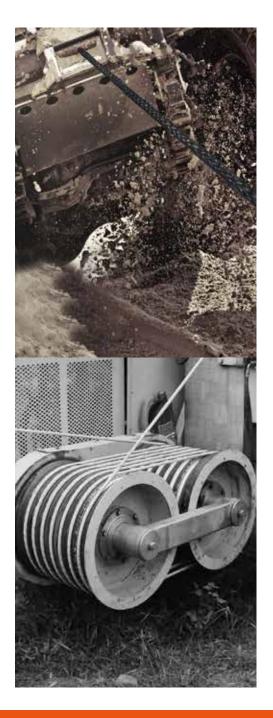

## **Optima 4C Elongation**

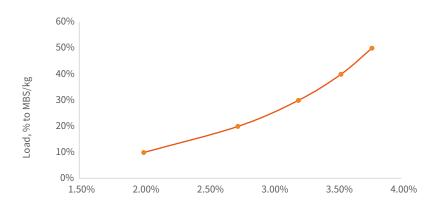

## **OPTIMA 4S**



- UHMWPE/UHMWPE
- · Very high strength, firm and round torque free
- Superior wear resistance and durability
- Smooth, reducing frictional heat buildup
- More lighter, floating



**OPTIMA 4C** 

- Polyester/UHMWPE
- Very high strength, firm and round torque free
- High wear resistance and durability
- Offers improved grip



STRENGT













