















UV and chemical resistance



Technical Information
































Diameter	Weight	Minimun Breaking Strength	Minimum Strength ISO Unspliced Rope
mm	kg /100m	ton	ton
10	8.9	9.5	10.6
11	10.0	11.6	12.9
12	13.8	15.0	16.7
14	17.5	19.0	21.1
16	25.7	24.6	27.3
18	33.7	32.7	36.3
22	46.7	46.0	51.1
24	55.0	52.0	57.5
26	67.5	61.1	67.9
28	79.2	68.0	75.6
30	87.5	77.5	86.1
32	101.7	91.0	101.1
36	123.5	103.0	114.4
40	156.7	134.0	147.8
44	191.7	147.0	163.3
48	213.3	164.0	182.2
52	261.7	198.0	220.0

Diameter, weight and MBS are determined in accordance with CI1500-02. Custom size and length available by request.





















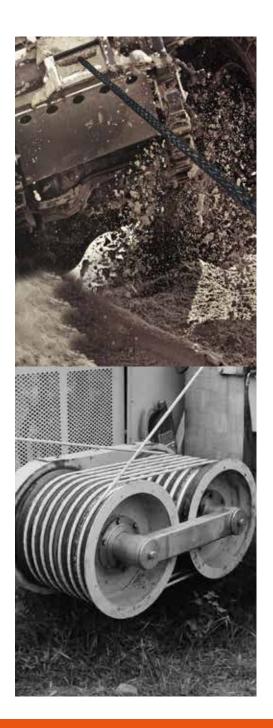

Optima 4C Elongation

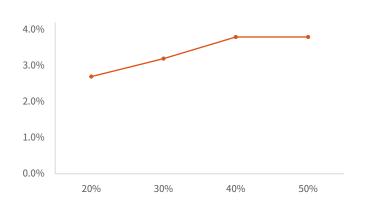

OPTIMA 4S



- UHMWPE/UHMWPE
- · Very high strength, firm and round torque free
- Superior wear resistance and durability
- Smooth, reducing frictional heat buildup
- More lighter, floating

OPTIMA 4C



- Polyester/UHMWPE
- Very high strength, firm and round torque free
- High wear resistance and durability
- Offers improved grip



STRENGT











