











Good wear resistance

UV and chemical resistance



Technical Information































Diameter	Weight	Minimun Breaking Strength	Minimum Strength ISO Unspliced Rope
inch	lbs/100ft	lbs	lbs
3/8	4.4	19,800	22,000
7/16	4.9	24,200	26,800
1/2	6.5	27,500	30,600
9/16	7.4	30,800	34,300
5/8	10.1	40,500	44,900
3/4	13.8	53,200	59,100
7/8	20.6	73,700	81,900
1	26.5	96,800	107,600
1 1/16	27.7	101,400	112,700
1 1/8	32.7	119,700	132,900
1 1/4	39.5	144,800	160,900
1 5/16	43.3	158,600	176,200
1 3/8	47.7	174,700	194,100
1 1/2	55.1	201,500	223,900
1 5/8	61.9	226,600	251,700
1 3/4	66.6	248,600	276,300
2	96.9	334,400	371,600
2 1/8	112.6	363,000	403,300

Diameter, weight and MBS are determined in accordance with CI1500-02. Custom size and length available by request.





















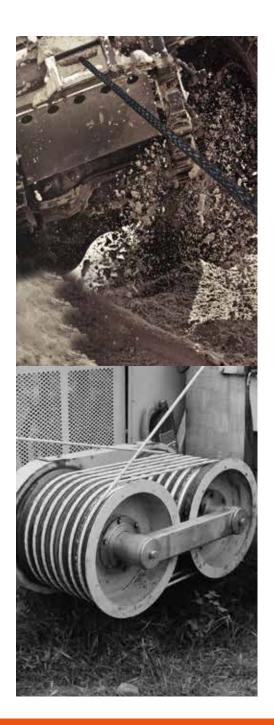

Optima 4S Elongation

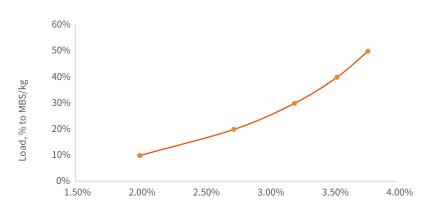

OPTIMA 4S



- UHMWPE/UHMWPE
- · Very high strength, firm and round torque free
- Superior wear resistance and durability
- Smooth, reducing frictional heat buildup
- More lighter, floating

OPTIMA 4C



- Polyester/UHMWPE
- Very high strength, firm and round torque free
- High wear resistance and durability
- Offers improved grip



STRENGT













